


# Threadless Brass Plugs

- High pressure seal
- For water lines
- 7/8" taper thread per foot
- Withstands pressure up to 72 psi
- Dry-seal thread

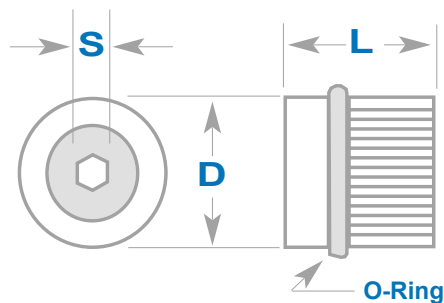

| Nominal Plug Size | Length | Hex Size | Drill Size | Catalog Number | Replacement O'Rings |
|-------------------|--------|----------|------------|----------------|---------------------|
| 1/8               | .50    | 5/64     | 11/32      | BTP125         | BTO125              |
| 1/8               | .50    | 5/64     | 23/64      | BTP125OS       |                     |
| 1/4               | .56    | 1/8      | 7/16       | BTP250         | BTO250              |
| 1/4               | .56    | 1/8      | 29/64      | BTP250OS       |                     |
| 3/8               | .62    | 1/8      | 9/16       | BTP375         | BTO375              |
| 3/8               | .62    | 1/8      | 37/64      | BTP375OS       |                     |
| 1/2               | .62    | 1/8      | 11/16      | BTP500         | BTO500              |
| 1/2               | .62    | 1/8      | 45/64      | BTP500OS       |                     |

## Water Line Diverting Plugs

| Diameter | Length | Catalog Number |
|----------|--------|----------------|
| 5/16     | .62    | WP312          |
| 7/16     | .62    | WP437          |
| 9/16     | .75    | WP562          |
| 11/16    | .87    | WP687          |
| 15/16    | 1.25   | WP937          |



## Water Line Spacer Rod

| Diameter | Length | Catalog Number |
|----------|--------|----------------|
| 1/8      | 18"    | WR18           |