


Water Baffles




- Dependable brazed SOLID BRASS construction
- Orientation slot provided
- Exact tolerances for improved flow performance
- A leak-free seal, up to 600 psi

Straight

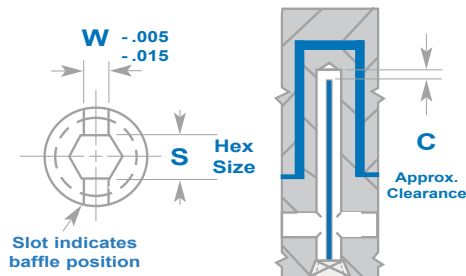

Plug NPT	Hex Size	Length	Baffle Thick	Baffle Width	Drill Size	Clear	Thread Length	Catalog Number
P	S	L	T	W	D	C	H	
1/16	5/32	4	3/64	1/4	1/4	.10	.250	SWB01604
1/16	5/32	8	3/64	1/4	1/4	.10	.250	SWB01608
1/8	3/16	4	1/16	5/16	5/16	.12	.250	SWB01204
1/8	3/16	8	1/16	5/16	5/16	.12	.250	SWB01208
1/4	1/4	5	3/32	7/16	7/16	.17	.406	SWB02505
1/4	1/4	10	3/32	7/16	7/16	.17	.406	SWB02510
3/8	5/16	6	3/32	9/16	9/16	.21	.406	SWB03706
3/8	5/16	12	3/32	9/16	9/16	.21	.406	SWB03712
1/2	3/8	8	3/32	11/16	11/16	.26	.531	SWB05008
1/2	3/8	16	3/32	11/16	11/16	.26	.531	SWB05016
3/4	9/16	12	1/8	15/16	15/16	.35	.531	SWB07512
3/4	9/16	20	1/8	15/16	15/16	.35	.531	SWB07520
1	5/8	16	1/8	1-1/8	1-1/8	.42	.656	SWB10016
1	5/8	24	1/8	1-1/8	1-1/8	.42	.656	SWB10024

Turbo

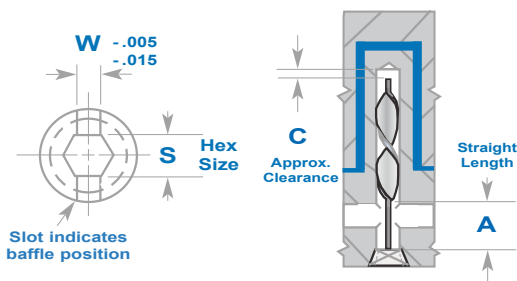

Plug NPT	Hex Size	Length	Baffle Thick	Baffle Width	Drill Size	Clear	Straight Length	Catalog Number
P	S	L	T	W	D	C	H	
1/16	5/32	4	1/16	1/4	1/4	.10	2	TWB00604
1/16	5/32	8	1/16	1/4	1/4	.10	4	TWB00608
1/8	3/16	4	1/16	5/16	5/16	.12	2	TWB01204
1/8	3/16	8	1/16	5/16	5/16	.12	4	TWB01208
1/4	1/4	5	3/32	7/16	7/16	.17	2	TWB02505
1/4	1/4	10	3/32	7/16	7/16	.17	4	TWB02510
3/8	5/16	6	3/32	9/16	9/16	.21	2	TWB03706
3/8	5/16	12	3/32	9/16	9/16	.21	4	TWB03712
1/2	3/8	8	3/32	11/16	11/16	.26	3	TWB05008
1/2	3/8	16	3/32	11/16	11/16	.26	5	TWB05016
3/4	9/16	11-7/8	1/8	15/16	15/16	.35	4	TWB07512
3/4	9/16	19-7/8	1/8	15/16	15/16	.35	6	TWB07520
1	5/8	15-7/8	1/8	1-1/8	1-1/8	.42	5	TWB10016
1	5/8	23-7/8	1/8	1-1/8	1-1/8	.42	8	TWB10024