


- Male is manufactured from a tough wear resistant tool steel & hardened to 60 Rc
- Female is manufactured from a quality tool steel & hardened to 62 Rc
- Both Male & Female Side Locks are Precision Ground for positive alignment for molds and interlocking cavities and cores

Interchangeable with
DME® Series

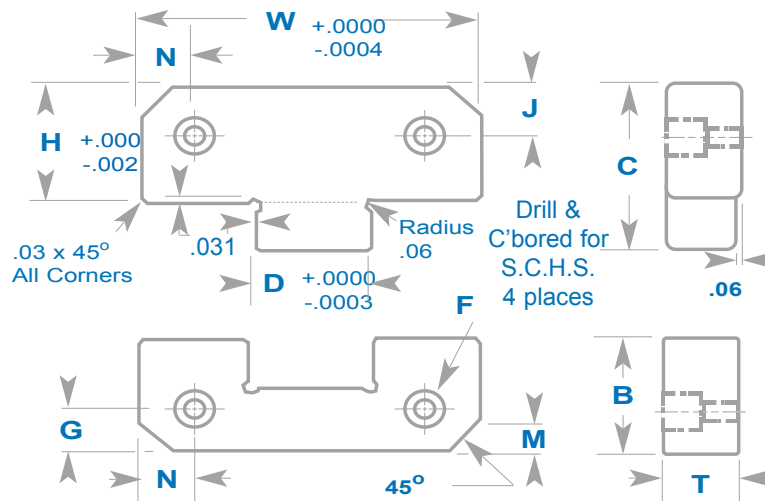

Overall Width W	Thick. T	Step Height H	Male Height C	Interlock Width D	Female Height B	Screw Y Axis G	Screw X Axis N	Screw Y Axis J	Chamfer Height M	Screw F	Catalog Number
1.500	0.620	0.870	1.180	0.500	0.870	.281	.281	.437	.190	1/4-20 x 3/4	CSL150
2.000	0.620	0.870	1.180	0.680	0.870	.375	.375	.437	.190	1/4-20 x 3/4	CSL200
3.000	0.745	1.360	1.910	1.000	1.370	.688	.375	.688	.190	3/8-16 x 1	CSL300
4.000	0.745	1.870	2.640	1.375	1.870	.875	.625	.875	.500	3/8-16 x 1	CSL400
5.000	1.120	1.870	2.640	1.750	1.870	.875	.750	.875	.500	1/2-13 x 1-1/4	CSL500

Note: Side Locks are sold in Male/Female sets only