


Brass Extension Fittings

- Easy length adjustments
- Tapered thread provides an excellent leak-free seal
- One Piece Brass Alloy construction for easy removal and assembly

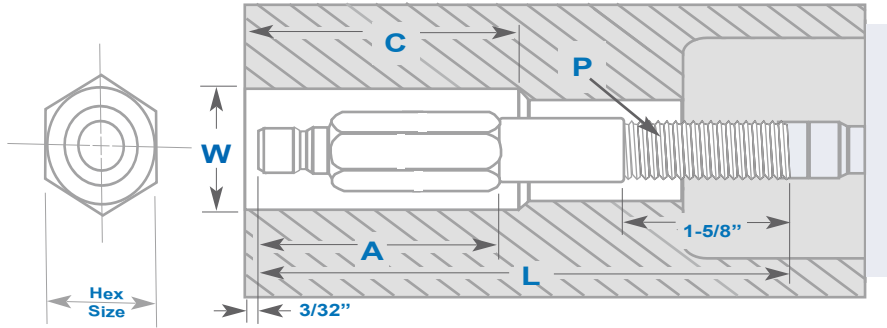

200 Series (1/4" Hole)

Thread Size P	Hex Size H	C'Bore Dia W	C'Bore Depth C	Head Length A	Overall Length L	Catalog Number
1/16	.375	.750	1.000	0.69	2.5	BEF250025
				1.00	4.0	BEF250040
1/8	.438	.875	1.250	0.69	2.5	BEF251025
				1.00	4.0	BEF251040
				1.00	5.5	BEF251055
				1.00	7.0	BEF251070
				1.00	8.5	BEF251085
1/4	.563	.875	1.500	1.00	10.0	BEF251100
				0.88	2.5	BEF252025
				1.25	4.0	BEF252040
				1.25	5.5	BEF252055
				1.25	7.0	BEF252070
				1.25	8.5	BEF252085
				1.25	10.0	BEF252100



300 Series (3/8" Hole)

Thread Size P	Hex Size H	C'Bore Dia W	C'Bore Depth C	Head Length A	Overall Length L	Catalog Number
1/16	.563	N/A	N/A	.88	2.5	BEF350025
				1.00	4.0	BEF350040
				1.00	5.5	BEF350055
1/8	.563	1.000	1.250	.88	2.5	BEF351025
				1.00	4.0	BEF351040
				1.00	5.5	BEF351055
				1.00	7.0	BEF351070
				1.00	10.0	BEF351100
1/4	.563	1.000	1.500	.88	2.5	BEF352025
				1.25	4.0	BEF352040
				1.25	5.5	BEF352055
				1.25	7.0	BEF352070
				1.25	8.5	BEF352085
				1.25	10.0	BEF352100
				1.25	11.5	BEF352115
3/8	.688	1.125	1.500	1.00	2.5	BEF353025
				1.25	4.0	BEF353040
				1.25	5.5	BEF353055
				1.25	7.0	BEF353070
				1.25	10.0	BEF353100



500 Series (1/2" Hole)

Thread Size P	Hex Size H	C'Bore Dia W	C'Bore Depth C	Head Length A	Overall Length L	Catalog Number
3/8	.813	1.375	1.625	1.13	2.5	BEF553025
				1.38	4.0	BEF553040
				1.38	5.5	BEF553055
				1.38	7.0	BEF553070

Pipe Size Chart

Pipe Size	O.D. of Pipe	I.D. of Pipe	Tap Drill Size		Minimum Tap Drill Length	Normal Thread Engage for Tight Joint
			Without Ream	With Ream		
1/16-27	.312	.209	1/4	15/64	9/16	.271
1/8-27	.405	.269	11/32	21/64	5/8	.273
1/4-18	.540	.364	7/16	27/64	13/16	.394
3/8-18	.675	.493	37/64	9/16	7/8	.407